FULL RANGE SPEAKER SYSTEM

CM-5ES

SERVICE MANUAL

KENWOOD

©1990-7 PRINTED IN JAPAN
B51-4190-00(T)1098

EXTERNAL VIEW

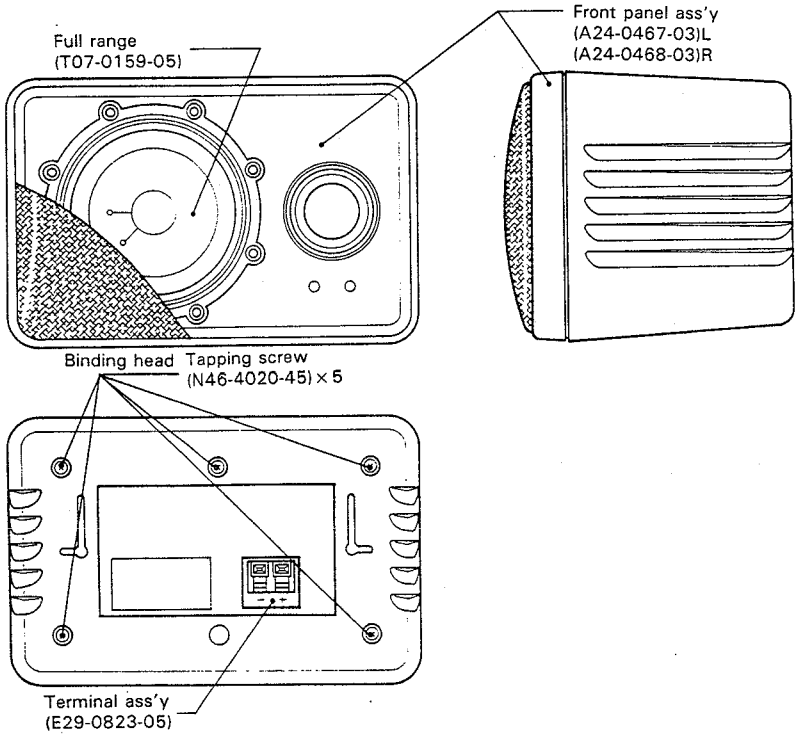

SPECIFICATIONS

System Type	Full-Range Speaker System
Enclosure	Bass-Reflex, Bookshelf Type Black Finished Poly-propylene
Driver	100 mm Cone Type
Maximum Input Power	40 Watts
Rated Input Power	20 Watts
Nominal Impedance	8 ohms
Frequency Response	100 Hz to 20,000 Hz
Sensitivity	89 dB/W at 1 m
Dimensions	W: 230 mm (9-1/16 in) H: 150 mm (5-7/8 in) D: 166 mm (6-9/16 in)
Net Weight	1.6 kg/piece (3-1/2 lb)
Accessories	2 Speaker Wires 4 Wood Screws 8 cushions

(KENWOOD follows a policy of continuous advancements in development. For this reason specifications may be changed without notice.)

PACKING

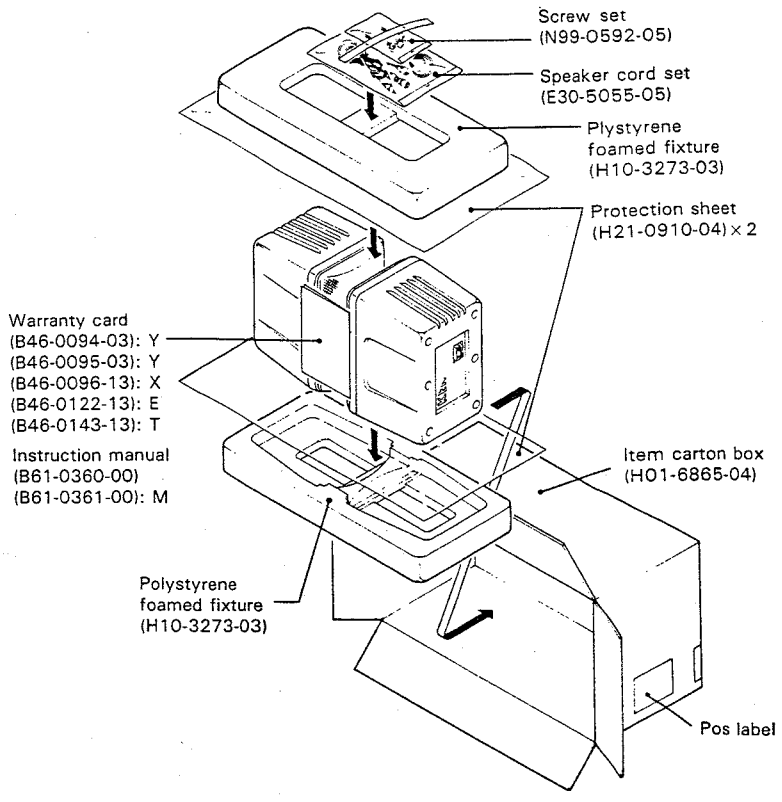

CM-5ES

PARTS LIST/DISASSEMBLY FOR REPAIR

* New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnes dans le Parts No. ne sont pas fournis.
Teile ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名／規格	Destination 仕向	Remarks 備考
			CM-5ES			
-		*	A24-0467-03	FRONT PANEL L ASSY		
-		*	A24-0468-03	FRONT PANEL R ASSY		
-		*	——	POS LABEL		
-			——	POS LABEL	Y	
-			B46-0094-03	WARRANTY CARD	Y	
-			B46-0095-03	WARRANTY CARD	X	
-			B46-0096-13	WARRANTY CARD	E	
			B46-0122-13	WARRANTY CARD	T	
-			B46-0143-13	WARRANTY CARD		
-						
-		*	B61-0360-00	INSTRUCTION CARD	M	
-		*	B61-0361-00	INSTRUCTION CARD		
-			E29-0823-05	TERMINAL ASSY		
-			E30-5055-05	SPEAKER CORD SET		
-			G13-1021-04	CUSHION SET		
-		*	H01-6865-04	CARTON BOX		
-			H10-3273-03	POLYSTYRENE FOAMED FIXTURE		
-			H21-0910-04	PROTECTION SHEET		
-			J31-0317-04	COLLAR		
-			N44-4012-45	BIND HEAD TAPPING SCREW		
-			N46-4020-45	BIND HEAD TAPPING SCREW		
-			N61-2413-45	ROUND HEAD WOOD SCREW		
-			N99-0592-05	SCREW SET		
SP1		*	T07-0159-05	FULL RANGE		

E: Scandinavia & Europe K: USA P: Canada W:Europe
Y: PX(Far East, Hawaii) T: England M: Other Areas
Y: AAFES(Europe) X: Australia

DISASSEMBLY FOR REPAIR

1. Remove the 5 screws (❶) from the rear panel.
2. Remove the panel Ass'y in the direction of the arrow (❷).
3. Remove the 4 screws and spacers (❸) fixing the speaker.

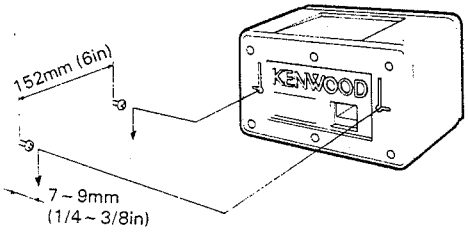

* Net cannot be disassembled.

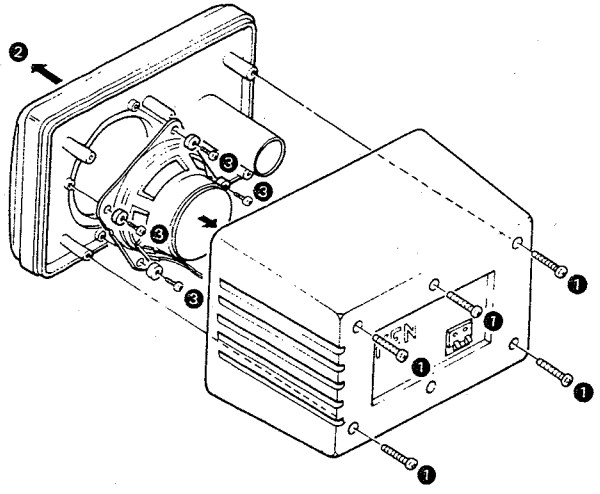

KENWOOD CORPORATION
Shonogi Shibuya Building, 17-5, 2-chome Shibuya, Shibuya-ku, Tokyo 150 Japan

KENWOOD U.S.A. CORPORATION
2201 East Dominguez Street, Long Beach CA 90810
550 Clark Drive, Mount Olive, NJ 07828 U.S.A.

KENWOOD ELECTRONICS CANADA INC.
P.O. BOX 1075, 959 Gana Court, Mississauga, Ontario, Canada L4T 4C2

TRIO-KENWOOD U.K. LTD.
KENWOOD House, Dwight Road, Watford, Herts., Wd1 8eb United Kingdom

KENWOOD ELECTRONICS BENELUX N.V.
Mechelsesteenweg 418 B-1930 Zaventem Belgium

KENWOOD ELECTRONICS DEUTSCHLAND GMBH
Rembrucker-Str. 15, 6056 Heusenstamm West Germany

TRIO-KENWOOD FRANCE S.A.
13 Boulevard Ney, 75018 Paris, France

KENWOOD LINEAR S.p.A.
20125, MILANO-VIA ARBE, 50, ITALY

KENWOOD ELECTRONICS AUSTRALIA PTY. LTD. (INCORPORATED IN NSW)
4E Woodcock Place, Lane Cove, N.S.W. 2066, Australia

KENWOOD & LEE ELECTRONICS, LTD.
Wang Kee Building, 4th Floor, 34-37, Connaught Road, Central, Hong Kong